

# MOKETA

## CARPETS



### TECHNICAL DETAILS

MANUFACTURING PROCESS	DIN ISO 2424	TUFTED 1/10"
FRONTSIDE STRUCTURE	DIN ISO 2424	CUT PILE - SAXONY
COLOR	DIN ISO 2424	CHROMOJET PRINT
PILE MATERIAL		100 % POLYAMID PA 6
PRIMARY BACKING	DIN ISO 2424	PES WOVEN
SECONDARY BACKING	DIN ISO 2424	FELT BACK
PILE WEIGHT	DIN ISO 2424	Approx. 1050 g/m <sup>2</sup>
TOTAL WEIGHT	ISO 8543	Approx. 2722 g/m <sup>2</sup>
PILE HEIGHT	ISO 1766	Approx. 5,5 mm
TOTAL THICKNESS	ISO 1765	Approx. 9,7 mm
NUMBER OF KNOTS	ISO 1763	Approx. 213000/m <sup>2</sup>
WIDTH	DIN 3018	Approx. 400 cm

### FUNCTIONAL PROPERTIES

WEAR CLASSIFICATION	EN 1307:2019	23/33
COMFORT RATING	EN 1307:2019	LC 3
CASTOR CHAIR RESTISTANCE	EN 985:Prüfung A	CLASS A


### PHYSICAL PROPERTIES

SOUND ABSORPTION COEFFICIENT	ISO 11654:1997-07	$\alpha_w = 0,30$ H
IMPACT SOUND INSULATION	ISO 10140-3	$\Delta L_w = 30$ dB
FIRE RATING	DIN EN 13501-1	Bfl-s1


glued on massive mineral concrete

### FASTNESSES

COLOUR FASTNESS TO LIGHT	EN ISO 105-B02:2013	6-7
COLOUR FASTNESS TO WATER	DIN EN ISO 105 E01:2013	5
RUBBERING FASTNESS DRY/WET	DIN EN ISO 105 X12:2002	5/5

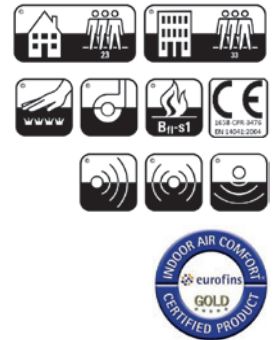

- ❗ ALL ARTICLES CAN BE PRINTED WITH ALL THE GRAPHICS' COLLECTION.  
 FELT BOTTOM, RIBBON BORDER MATCHING THE PREDOMINANT COLOUR OF THE GRAPHIC.  
 OUT-OF-MEASURE TO QUOTE, BOTH IN SIZE AND SHAPE.

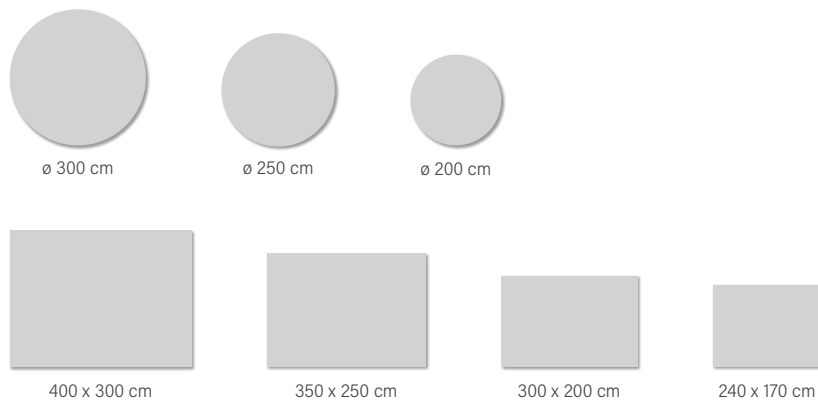

top



back

**BORDO RIBBON**  
 IF NOT SPECIFIED, THE CHOICE  
 OF BORDER COLOUR IS AT THE  
 DISCRETION OF INSTABILELAB.