

MOKETA

CARPETS




MOKETA È IL TAPPETO CHE LASCIA SPAZIO A UNA PERSONALIZZAZIONE TOTALE E ALLA MASSIMA LIBERTÀ CREATIVA GRAZIE A UN MATERIALE IDEATO PER OFFRIRE UN'OTTIMA RESA DI STAMPA CON TUTTE LE GRAFICHE INSTABILELAB.

CAPACE DI APPAGARE TUTTI I SENSI A PARTIRE DAL TATTO CON IL SUO PELO CORTO, CONFORTEVOLE E DELICATO, FINO ALLA VISTA GRAZIE A UNA RESA CROMATICA ESCLUSIVA, CAPACE DI CONFERIRE CARATTERE A OGNI AMBIENTE.

UN OGGETTO DI ALTO DESIGN, ARRICCHITO DA FINITURE DI PREGIO IN OGNI DETTAGLIO, CORONATE DA UN BORDO CHE RICHIAMA IL COLORE PREDOMINANTE DELLA GRAFICA.

DIMENSIONI

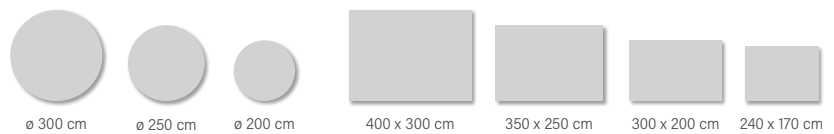

TECHNICAL DETAILS

MANUFACTURING PROCESS	DIN ISO 2424	TUFTED 1/10"
FRONTSIDE STRUCTURE	DIN ISO 2424	CUT PILE - SAXONY
COLOR	DIN ISO 2424	CHROMOJET PRINT
PILE MATERIAL		100 % POLYAMID PA 6 - ECONYL
PRIMARY BACKING	DIN ISO 2424	PP WOVEN
SECONDARY BACKING	DIN ISO 2424	FELT BACK
PILE WEIGHT	DIN ISO 2424	Approx. 1200 g/m ²
TOTAL WEIGHT	ISO 8543	Approx. 2500 g/m ²
PILE HEIGHT	ISO 1766	Approx. 6,0 mm
TOTAL THICKNESS	ISO 1765	Approx. 9,5 mm
NUMBER OF KNOTS	ISO 1763	Approx. 213000/m ²
WIDTH	DIN 3018	Approx. 400 cm



FOR AREAS WITH
NORMAL COMMERCIAL USE



FLAME RETARDANT C_{fl}-s1



PERMANENT USE



LUXURY CLASS LC5



CE MARKING

FUNCTIONAL PROPERTIES

WEAR CLASSIFICATION	EN 1307:2014+A3:2018	33
COMFORT RATING	EN 1307:2014+A3:2018	LC 5
CASTOR CHAIR RESTISTANCE	EN 985:Prüfung A	CLASS A

PHYSICAL PROPERTIES

FIRE RATING	DIN EN 13501-1	Cfl-s1 *1
-------------	----------------	-----------

*glued on massive mineral concrete

FASTNESSES

COLOUR FASTNESS TO LIGHT	EN ISO 105-B02:2013	7
--------------------------	---------------------	---

FONDO IN FELTRO - BORDO IN TINTA



RIBBON

Bordo in morbido tessuto di stretto spessore ideale per i tappeti rotondi, realizzabile anche sui tappeti rettangolari.

ECONYL

